


Fast recovery high voltage diodes

Reverse Voltage – 20KV-30KV

Forward Current –100mA

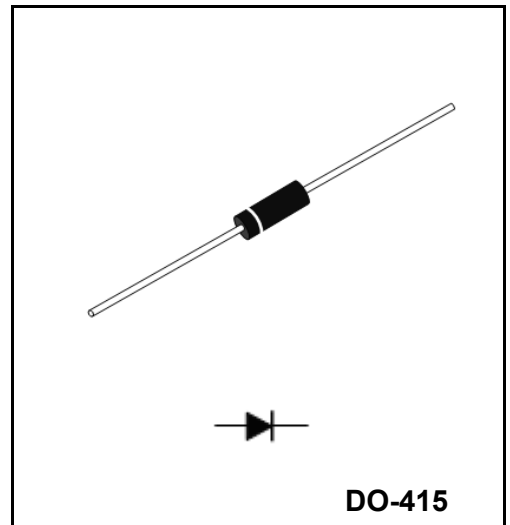

FEATURES

- ◆Supersmall size
- ◆High reliability
- ◆High speed switching


MECHANICAL DATA

- ◆Case: Molded Plastic Body
- ◆Epoxy meets UL 94V-0 flammability rating
- ◆Terminals: Pure tin plated leads, solderable per J-STD-002and JESD22-B102, E3 suffix for consumer grade, meet JESD201class 1A whisker test.
- ◆Polarity: Color band denotes cathode end

Maximum rating (Ta=25°C unless otherwise noted)

Parameter		Symbol	2CL2FM	2CL2FP	Unit
Repetitive peak reverse voltage		V_{RRM}	20	30	KV
Average forward current	60Hz half-sine wave, Resistance load, Ta=25°C	$I_{F(AV)}$	100		mA
Surge(Non-repetitive)forward current	60Hz half-sine wave, 1cycle, Ta=25°C	I_{FSM}	10		A
Peak forward voltage	$I_{FM}=100mA$	V_{FM}	35	46	V
Peak reverse current $V_{RM}=V_{RRM}$	Ta=25°C	I_{RRM}	2 50		μA
	Ta=100°C				
Reverse recovery time	$I_F=10mA, I_{RM}=20mA$	T_{rr}	0.1		uS
Operating ambient temperature		T_a	-40 ~ +125		°C
Storage Temperature Range		T_{stg}	-40 ~ +125		°C
Virtual junction temperature		$T_{(vj)}$	125		°C

Package outline dimensions

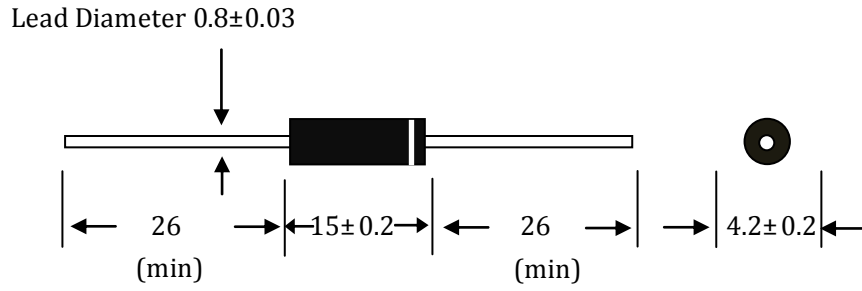

Summary of Packing Options

Package	Packing Description	Packing Quantity	Industry Standard
DO-415	BOX	5000	EIA-481-1