

Surface Mounted Supper Fast Rectifiers

Reverse Voltage - 800 to 1000 V

Forward Current - 1 A

FEATURES

- Low reverse leakage
- High forward surge capability
- High reliability
- High temperature soldering guaranteed:260℃/10seconds
- Lead and body according with RoHS standard

MECHANICAL DATA

- Case:DO-214AC Molded plastic
- Epoxy: UL 94V-0 rate flame retardant
- Lead: Pure tin plated, lead free

Maximum Ratings & Characteristics

Ratings at 25℃ ambient temperature unless otherwise specified.

Parameter	Symbols	ES1K	ES1M	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	800	1000	V
Maximum RMS voltage	V_{RMS}	560	700	V
Maximum DC Blocking Voltage	V_{DC}	800	1000	V
Maximum Average Forward Rectified Current at	$I_{F(AV)}$	1.0		A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load	I_{FSM}	30		A
Maximum Instantaneous Forward Voltage at 1 A	V_F	2.5		V
Maximum DC Reverse Current $T_a = 25\text{ }^{\circ}\text{C}$ at Rated DC Blocking Voltage $T_a=100\text{ }^{\circ}\text{C}$	I_R	5 50		μA
Typical Junction Capacitance at $V_R=4\text{V}, f=1\text{MHz}$	C_j	15		pF
Maximum Reverse Recovery Time	T_{rr}	35		nS
Typical Thermal Resistance (Note 1)	$R_{\theta JA}$	85		$^{\circ}\text{C/W}$
Operating and Storage Temperature Range	T_j, T_{stg}	-55 ~ +150		$^{\circ}\text{C}$

1) Thermal resistance from junction to ambient, PCB mounted.

Pinning


1.Cathode	2.Anode
 DO-214AC/SMA	

Marking Code


ES1K	YFW ES1K
ES1M	YFW ES1M

Characteristic Curves


TYPICAL FORWARD CHARACTERISTIC

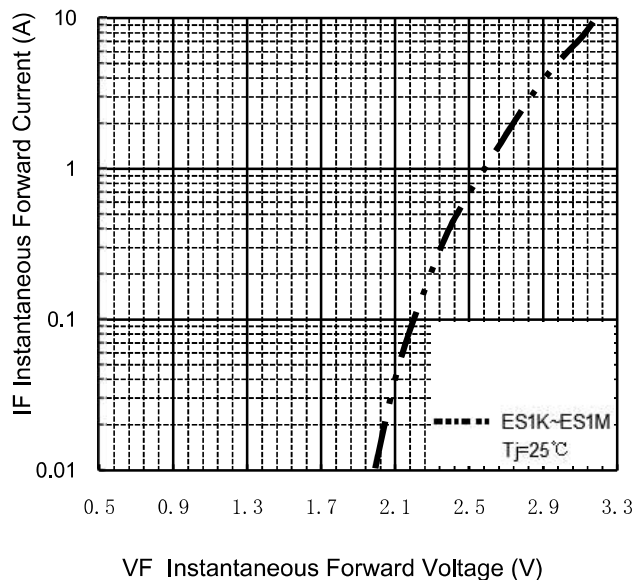


FORWARD CURRENT DERATING CURVE

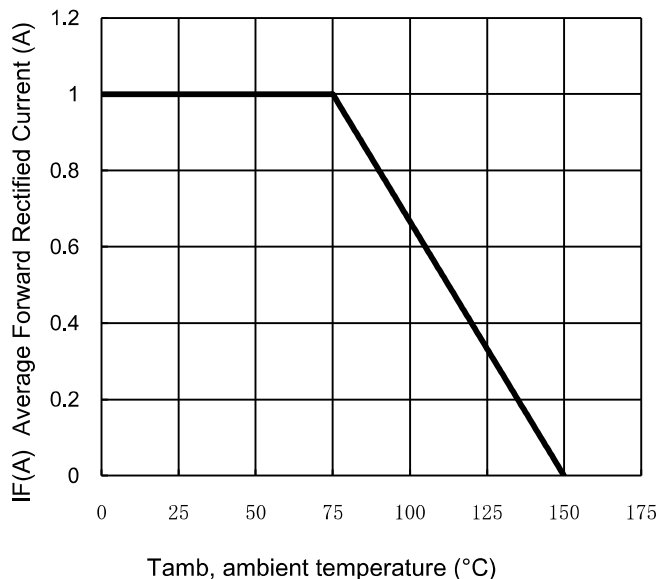

MAXIMUM NON REPETITIVE
PEAK FORWARD SURGE CURRENT

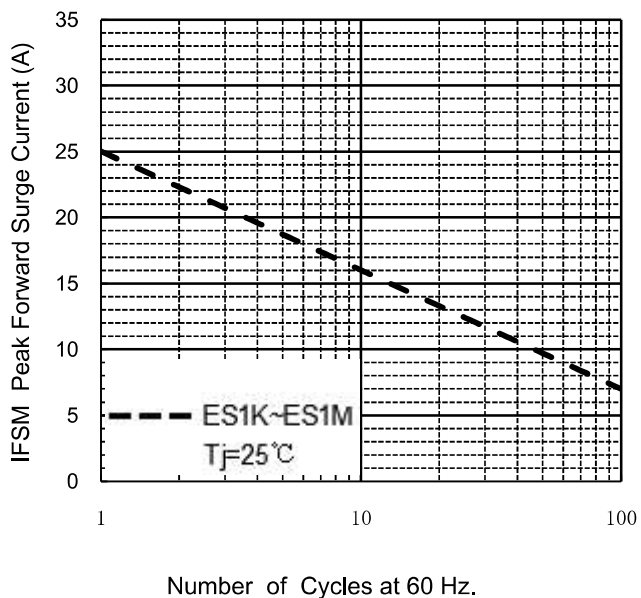

TYPICAL REVERSE CHARACTERISTICS

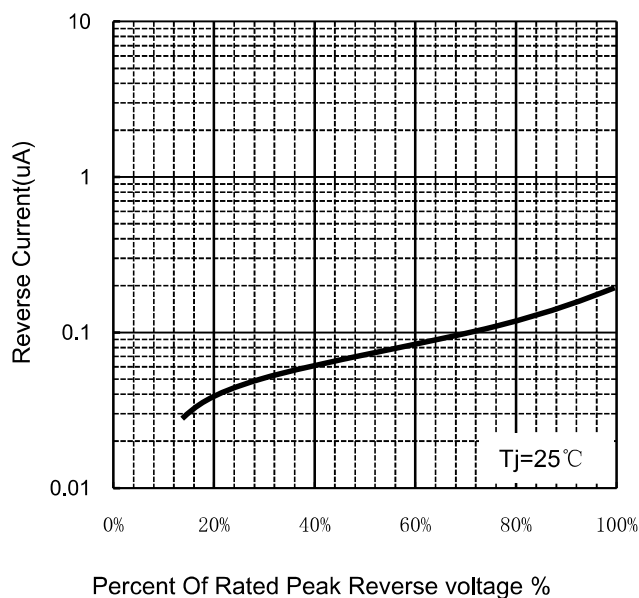

Marking Diagram



Ordering information


Package	Packing Description	Packing Quantity
DO-214AC SMA	Tape/Reel, 13" reel	5000PCS/Reel 50000PCS/Carton

Package Dimensions

DO-214AC SMA

Dim.	Millimeter(mm)		mil	
	Min.	Max.	Min.	Max.
A	1.9	2.45	75	96
D	4.0	4.5	157	181
E	2.5	2.8	100	110
H _E	4.7	5.2	185	205
c	0.15	0.31	6	12
e	1.3	1.8	51	71
g	0.9	1.5	35	59
b	0.05	0.2	2	7.9
a	0.3		12	

The recommended mounting pad size

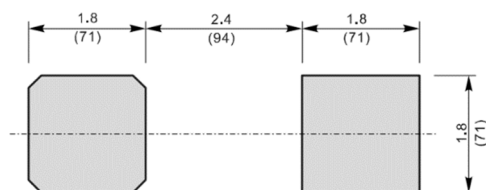

Unit : $\frac{\text{mm}}{(\text{mil})}$

Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.